F-7(P) (195) Department.

M SERIES.

G.O. NO. 82

Dated 3-3-51

25024/52

[Despatch Abstract.]

From Sri
A.L.V[illegible]tachari,B.E.,M.I.E.(Ind).,
M.Am.Soc.,C.E.,I.S.E.,
Chief Engineer for Irrigation,
Chepauk.Madras.

To 11

The Commissioner for Food
Production,
Board of Revenue,Madras.

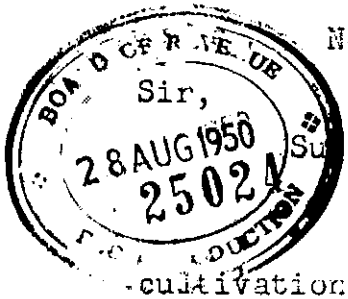

No.3963/50H-3 dated 22nd August 1950.

Sir,

Sub:-Irrigation - Kollegal taluk - Ajjipuram village - anicut across Uduthorahalla stream report on the.

- - - -

The above scheme is included in the Intensive cultivation programme, its number in the list being 27 - Section I. An estimate for Rs.84,000/- for the above work was received only recently from the Superintending Engineer and is under check in this office. The Superintending Engineer reports that the success of this scheme will entirely depend upon the ryots' response to resort to wet cultivation in the proposed ayacut under the scheme. The Collector has been referred to for his opinion on the administrative and financial aspects of the scheme and his report is awaited. As it will take sometime to decide these issues, and as it may not be possible to execute the scheme before the target date, I recommend its deletion from the target list.

For Chief Engineer for Irrigation.
24.8.50

Copy to Secretary to Government, for advance information.

SR:22/8

Issue
ASF? 2/9/50

Draft.

Irrigation — Kollegal taluk. Attipuram village — anicut across Kudathoravalla stream - report.

Ltr from C.E (I) letter No. 3963/50-M-5 dated 1-9-50

Bdi 2nd 25024/50 F.P.II dt. 5.9.50

Copy communicated to the Collector of Coimbatore for early remarks.

Dft 2/9 Initials 2/9/50

6-SEP 1950

To
The Collr of Coimbatore

G.N:— The report & the C.E(I) is at P 1 ft. It may be perused. Collr's remarks may be called for. Draft above is for approval.

Dft 2/9 Initials 2/9/50

BOARD OF REVENUE
30 SEP 1950
29014
FOOD PRODUCTION

From
Sri V.N.Rajan, I.C.S.,
Collector & Dt. Magistrate,
Coimbatore.

To
The Secretary to the Commissioner
of Food Production,
Board of Revenue,
Madras.

Ref: A.2. 22648/50 dated the 23rd Septr., 1950

Sir,

Sub:- Irrigation--Kollegal Taluk--Ajjipuram village-
Dommangadda anicut -across Uduthorahalla stream-
Report called for--Report submitted.

Ref:- Board's Ref.25024/50 F.P.II dated 5-9-50

...

This is a proposal for improvements to Dommanagadda anicut in Kollegal Taluk. A copy of the estimate for the above work amounting to Rs.84000/- received from the Superintending Engineer, Coimbatore Circle is herewith enclosed.

2. The details of the scheme are explained in the report accompanying the estimate. The Dommanagadda anicut is a private one across the river Uduthorahalla a jungle stream starting from the hills of Gobichettipalayam taluk and finally flowing into the River Cauvery. This anicut was permitted to be constructed in 1888 under Board's Order Mis. 8387 dated 11-11-1888 to irrigate 274.90 acres. Only 25 to 30 acres are irrigated now under this anicut. The several owners of the anicut have got 290-30 acres of land as detailed below:-

S.No.	2	7.20
	4	26.10
	5	5.75
	6	2.60
	7	5.30
	8	3.90
	720	186.45
	723	20.65
	724	10.90
	730	21.45
		290.30

The several pattadars and owners of the above anicut have unconditionally relinquished their right over the anicut. The have also agreed to part with the lands required for channel free of cost. In the estimate prepared by the P.W.D. has made provision for a sum of Rs.3000/- for acquiring lands for channel. Deducting this amount from the amount of the estimate, the net amount comes to Rs.81000/- as against Rs.84000/-. The return comes to 1.66% as in the calculation sheet enclosed. The lands are in a compact block owned by the several pattadars who belong to the same family and they are fit for wet cultivation. The contour of the land is reported to be such that irrigation can be made without any difficulty. The pattadars are anxious to improve their lands if facilities for irrigation are provided. The pattadars have also agreed to bring the entire extent under wet cultivation, they are also willing to pay water-rate at Rs.6-8-0 per acre. The scheme is better than the Uduthorahalla scheme. The soil in the area is also better and the lands can be brought under cultivation more easily than in the former case. I therefore recommend that the scheme may be taken up this year itself. If it is not possible to take up the scheme this year it may be taken up at least next year.

For Collector.

p.t.o.

Statement of financial aspect of the scheme.

Total estimated cost:	Rs. 81000/-
Addl. revenue anticipated at Rs.6/8/- per acre on about 285 acres	1852/-
Deduct collection charges at 5%	93/-
Maintenance charges at 12 as per acre	214/-
Abatement of land revenue about Rs.200/- on 285 acres	201/-
(Note) Assessment on 290 acres comes to only Rs.205/- Hence abatement at Re.one per acre is not necessary.).	
Net deductions:	508

Net revenue

Therefore return is $\frac{1344 \times 100}{81000}$ -1.66 %

(True Copy)

NCS.26/9

Statement of financial forecast.

Total estimated cost	Rs. 84000
Additional revenue anticipated at Rs.6-8-0 per acre on 275 acres	1780
Deduct collection charges at 5%	89
Maintenance charges at 0-12-0 per acre	206
Abatement of land revenue at Re.1/- per acre	275
Net deductions	570
Therefore net revenue:	1210

Therefore return: $\frac{1210 \times 100}{84000}$: 1.44%

Report to accompany the estimate for improvements to Dommanagadda anicut, Kollegal taluk, Coimbatore district:-

History and Location:- The Dommanagadda anicut is a private one across the river Uduthorahalla a jungle stream starting from the hills of Gobichettipalayam taluk and finally flowing into the river Cauvery. The anicut is situated in S.No. 719 of Dommanagadda hamlet of Ajjipuram village, Kollegal taluk (Coimbatore District) This anicut was permitted to be constructed in 1888 under Board Standing Order Mis.8387 dated 11-11-1888 to irrigate 274.90 acres.

Condition of Anicut:- The anicut is of brick masonry wall of 51' 6" length. The crest 24' width is finished with a levelling course of concrete with stepped roughstone apron on the rear up to the rock outcrop. The body wall is in a badly neglected condition Much water is finding its way through crevices in the body wall with the result that there is insufficient draw in the channel. The anicut is provided with masonry wing walls on either side. A head sluice of 4' 6" x 2' 6" ventway without shutter arrangements is located on the right side. The anicut and the head sluice are in a state of disrepairs from a long time-due to the neglect of the ryots. Only about 25 acres is normally under cultivation against 275 acres originally contemplated.

Present condition of Irrigation: Out of 274.90 acres stipulated for irrigation only 25 acres of wet cultivation is carried on through a contour channel of 3450' with open cuts. The pattadars had made attempts to extend the channel and formed a tank at the tail end of 0.75 M. cft. capacity which after some time breached due to non-provision of surplus arrangements.

Availability of water: The gauging results conducted at the gauging weir across the stream 3 miles above the Dommanagadda anicut from 48-49-vide statement enclosed reveals sufficient flow in the river to irrigate 342 acres at 20 duty. Below the anicut upto the infall of Uduthorahalla into the Cauvery there is no recognised irrigation.

Proposals:- It has been suggested by the Collector, Coimbatore, that if the anicut, channel and the tank are restored and brought to efficient condition, about 275 acres as originally contemplated in 1888 could be brought under wet cultivation as against 25 acres at present and the scheme will have ample G.M.F. value. The Addl. Chief Engineer in his No.6346/49 M.9 dated 21-2-50 has ordered for the detailed investigation of the scheme. Hence the estimate. The following improvements are proposed.

1. A masonry skin wall 3'0" thick in cement mortar will be provided in front of the anicut; under pinning the crevices of existing bodywall.

This will effectively stop leakage and maintain adequate level in front of the head sluice to draw about 18 cusecs normally.

2. The perished levelling course of concrete on the crest will be relayed with cement concrete.

3. The existing wing walls on either side will be raised 1'0" above M.W.L. and other petty repairs to apron and revetment on either side will be carried out.

4. The head sluice will be provided with screw gearing shutters after necessary repairs.

5. The present silted up channel for 3450' will be restored and extended to 16200 to draw 18 cusecs at head as per hydraulic calculations. The channel will be divided into two reaches of (i) 0 to 10800 F.S.L. 2' 3" bed width 4' 0" and (ii) 10800 to 16200 F.S.L. 2' 0" bed width 3' 0" to irrigate 342.42 acres at an average duty of 20 acres.

6. Eight masonry sluices with shutter arrangements will be provided as per statement enclosed. The pipes will first be fixed in earth and masonry head walls constructed later on after the ayacut develop.

7. A drainage under tunnel will be provided at 3450' to discharge the cross drainage from 0.6 sq. inch catchment area intercepted by the channel.

8. A syphon for the cross drainage at 7350' will be provided (catchment 0.80 sq. miles).

9. Another syphon will be provided at 12000 for the cross drainage of 0.26 sq. miles catchment.

10. Culverts at L.S.6000, 9600, 15720 will be provided for the cart track crossings.

11. A tail end dam will be provided at L.S.16200 for which lump sum provision has been made.

12. Lump sum provision is also made for land acquisition for the channel if necessary.

General:- On detailed investigation it is noticed that no purpose will be served by restoring the breached tank at L.S.6200 since the bed level of the channel in the left flank is 4'0" above the F.T.L. of tank and the capacity of the tank is only 0.75 m. c. ft. It is found economical to take the extended channel on the foreshore of the tank irrigating the tank bed also. As there is almost continuous supply of about 20 cusecs in Uduthoraihalla at the anicut site for nearly 8 months in the year, a tank store supplies is not considered necessary. The channel is taken under balanced depth of cutting throughout and the soil met with is generally hard gravel. The District Agricultural Officer, Coimbatore in his letter No.Roc.B.1/45 dated 25-1-45 has recommended the soil in the locality as fit for wet cultivation. This scheme is included in the target of G.M.F. schemes in Coimbatore Circle -vide item No.3 (Chief Engineer (Additional)'s No.6346/49 M dated 21-2-50).

Sd.T.N.Chandrasekharan
13-5-50
Executive Engineer, Salem Dvn.

Improvements to Dommanagedda anicut and channel No.67 Ajjipuram

village, Kollegal Taluk: -

1. Anicut and head sluice.

No.	Quantity	Description of work	Rate	Per	Amount.
1	L.S.	Clearing light jungle			50
2	9.0 units	Earthwork in hard stiff soil for excavating foundations s.s.20 A	19-8-0		176
3	L.S.	Baling out water providing shoring planks etc. if found necessary during execution			200
4	1650 cft.	concrete broken stone in cement mortar (1: 5 : 12½)	106-8-0	100 cft.	1757
5.	3900 c.ft.	Country brick in cement mortar	1:4.128/6	100 cft	5007 544
6.	3400 c.ft.	Plastering with cement mortar 1: 3 ½" thick	16	"	544
7	1200 s.ft.	Flush pointing random rubble with cement mortar 1: 3	12	"	144
8	l.s.	Providing needle shutter arrangements to head sluice including front and rear head wall platform wall, guide beams complete	l.s.		750
9.	6500	Roughstone dry packing for apron and revetment etc.	51	"	2015
10	"	Unforeseen items such as removing shoals in front of anicut, uprooting trees that affect anicut and raising right flood bank 2 ft. above M.F.L	1		850
11	l.s.	Contingencies and petty supervision ...			507
					12000

Estimate form-abstract
II. Channel

1	L.S.	Clearing jungle in the head reaches of the channel	l.s.		300
2.	120 units	Earthwork in hard stiff soils s.s.20 A.	24.6.0	unit	2925
3.	255 units	-do- gravelly soil s.s.20 A.	27.6.0	"	6981
4.	L.S.	Add for extra lift in the existing deep cutting portion of the channel masonry site and for variation in soils etc.	l.s.		500
5.	-do-	Add extra for removal of boulders, blasting rock etc. if met with			537

6.	L.S.	Unforeseen items			300
7.		Contingencies and petty supercision charges	1.s.		457
			Total		12300

Improvements to Dommanagadda-anicut and channel in 87 Ajjipuram village Kollegal Taluk-Construction of an under tunnel at L.S. 3450 ft.

1	L.S.	Earthwork excavation in hard gravelly soil for foundations	1.s.		100
2	1200 c.ft.	Concrete broken stone in cement mortar/12½ with 1" broken granite 1:5	106-8-0	100 c.ft.	1284
3.	100 c.ft.	Wearing cost of 3" baby jelly concrete in cement mortar 1: 3 : 6	203.8.0	-do-	204
4	1300 c.ft.	Random rubble in cement mortar 1: 5	101.0.0	-do-	1315
5.	160 c.ft.	Cutstone covering slab 3 faces dressed.	9.0.0	c.ft.	1440
6.	1.s.	Deepening the channel			200
7.	do	Unforeseen items			348
8.	do	Contingencies and petty supervision			209
				Total Rs.	5000

Improvements to Dommanagadda anicut-Constructing a culvert at L.S. 6000 feet.

Estimate form-abstract.

1.	2000 c.ft.	Earthwork excavation in hard gravelly soil for foundations	21.14.0	1000 c.ft.	44
2.	550 c.ft.	Concrete broken stone in cement mortar 1: 5 : 12½ with 1½" stone	106.8.0	100 c.ft.	586
3.	570 c.ft.	Random rubble in cement mortar 1: 5	101.0.0	-do-	516
4.	6 c.ft.	Concrete coping 1: 3: 6 with ¾" thick metal	155/-	-do-	9
5.	84 c.ft.	Cutstone slab	9/-	cft.	756
6.	4 Nos.	Guardstones (3½ ft. x 9"dia)	9.13.0	each	41
7.	1.s.	Forming approaches and metal road at sites of culverts	1.s.		200
		Unforeseen items			195
		Contingencies and petty supervision			143
				Total Rs.	2550

Constructing a pipe sluice in Dommanagadda anicut channel
Estimate form-abstract

Item No.	Quantity	Description of work	Rate	Per	Amount
1	L.S.	Earthwork excavation for foundation etc.	l.s.		10
2.	100 c.ft.	Concrete broken stone in cement mortar (1: 5: 12½)	106-8-0	100 cft.	107
3.	130 c.ft.	Random rubble in cement mortar 1: 5	101-0-0	-do-	131
4.	15 rft.	Supplying and fixing 4" dia-pipes for sluice	4-0-0	1 rft.	60
5.	L.S.	Pointing random rubble masonry and providing plug for sluice and other unforeseen items ..		l.s.	42
					350

Constructing a tail dam in Dommanagadda anicut channel
Estimate form.

1.	L.S.	Earthwork excavation for foundations			10
2.	100 c.ft.	Concrete broken stone in cement mortar 1: 5: 12½	106-8-0	100 cft	107
3.	200 c.ft.	Random rubble masonry in cement mortar 1: 5	101.0.0	-do-	202
4.	L.s.	Providing a 6" dia.pipe in the bodywall at bed level for draining the channel when necessary		l.s.	10
5.	l.s.	Other unforeseen works including plastering or pointing masonry and fluctuations in rates etc.			51
				Total Rs.	380

Constructing syphon at 1200 feet-Estimate form-Abstract

Quantity	Description of work	Rate	per	Amount
1. 5500 c.ft.	Earthwork excavation in hard gravelly soil for foundations	21-14-0	100 c.ft.	120
2. 900 c.ft.	Concrete broken stone in cement mortar 1: 5: 12½ ..	106-8-0	-do-	959
3. 200 c.ft.	Concrete broken stone in cement mortar 1: 3	131-6-0	-do-	263
4. 108 c.ft.	Cutstone work set in cement mortar	9-0-0	1 c.ft.	972
5. 2140 cft.	11 class brick work in cement mortar 1: 4	128-6-0	100 cft.	2747
6. 3840 cft.	Roughstone dry packing for revetment and aprons	31	"	1190 374

7. 2400 s.ft. Plastering with cement mortar 1:4 16. 100 c.ft. 374

L.S.	Unforeseen items and petty supervision and contingencies ...	l.s.	375
		Total Rs.	7000

Improvement to Dommangudda anicut channel

Item	Quantity	Description of work	Rate	per	Amount
1		Repairs to existing anicut and headsluice			12000
2.		Repairs to existing channel and extension			12300
3.		Constructing a drainage under tunnel at L.S.3450			5000
4.		Constructing a syphon at L.S.7350 (similar to item 7 below)			7000
5.	3 Nos	Constructing culverts at L.S.6000' 9600' and 15720'	2550	each	7650
6.	8 Nos.	Constructing pipe sluices	350	,,	2800
7.	1.	Constructing a syphon at L.S.12000			7000
8.	l.s.	Excavating field bothies for 275 acres	15	acre	4125
9.	l.s.	Providing mile and furlong stones			170
10.	l.s.	Constructing workmen's shed, camping shed etc.	l.s.		5000
11.		Constructing a tail dam at l.s. 16200'			380
12.	l.s.	Land acquisition for channel	l.s.		3000
13.	L.s.	Importing labour from outside	l.s.		3000
14.	l.s.	Forming roads to worksite repairing existing cart tracks	l.s.		3250
15.	l.s.	Unforeseen items and fluctuation in rates	l.s.		5325
16.	l.s.	Contingencies and petty supervision			4000
			Total	Rs.	84,000

NOS.

2 numbers
2

for collector

BB. 28/9

Issue slip

Very urgent

Rd ग्रन्थ (Ft)

Coimbatore -- Kollegal taluk - Ajjipuram village - Scheme - Scheme with Mohalla Scheme -

---

From the Cl(S) Lr. No. 3963/50 M3 dt. 22
From the Collector of Coimbatore
Ref. A. 2. 22628/50 dt. 23/9/50

29/9/50

Rdg Ref - No. 2500/50-2 Fd. dt. 28/10/50

A copy of the Collector's letter cited is forwarded to the Cl(S). The C.E. is requested to state whether the scheme cannot be taken up for (the end of) execution so as to be completed before March 1952. He is requested to expedite submission of plans and estimates in respect of the Scheme immediately if

3/2/20/t

14
it can be completed ~~before~~ within the target date.

Vbp
-7 | 10/50 hrs m3
2 2x5

3
28/ x 1/10

2)
the cruise
with engine o

From Sri
A.R. Venkatachari, B.E.,M.I.E.(Ind).,
M.Am.Soc. C.E.,I.S.E.,
Chief Engineer for Irrigation,
Chepauk, Madras.

To
The Commissioner of Food
Production,
Chepauk.

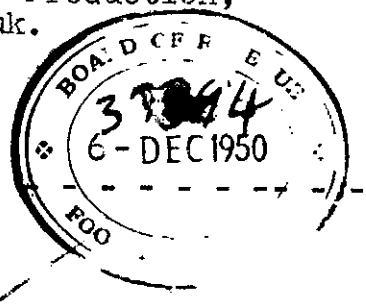

No. 3963/50 M-5 dated 27th November 1950.

Sir,

Sub:- Irrigation - Coimbatore District - Kollegal taluk - Ajjipuram village - Anicut across Uduthorahalla Sch

...

Ref:- From the Board of Revenue No. 25024/50-F.P.II dated 25.10.50.

....

A copy of Collector's letter sent by the Board along with Board's reference cited above was received earlier in this office along with Superintending Engineer's letter recommending inclusion the scheme in the target list on the strength of the recommendation of the Collector. The Superintending Engineer has been asked to r whether it would be possible for him to send detailed estimates after attending to some of the remarks pointed out to him from this office complete in all respects, before the end of December 1950. On receipt of reply from the Superintending Engineer a definite reply to the Board's reference will be sent.

for Chief Engineer for Irrigation.

cmj/28.11.

-17-

From Sri
T.S. Venkatarama Iyer, B.E., I.S.E.,
Chief Engineer (Buildings & G.M.F.)
Chepauk, M a d r a s.

To
The Commissioner of Food Production,
Board of Revenue, Chepauk, Madras.

No.3963/50-M-7 dated the 9th January 1951.

Sir,

Sub:- Irrigation - Coimbatore circle - Kollegal taluk - Ajjipuram village - Anicut across Uduthorahalla -

Ref:- (i) From the Board of Revenue, No.25024/50-F.P.II dated 25--10--1950.

(ii) Chief Engineer's (Irrigation) No.3963/50-M-5 dated 27--11--1950.

In continuation of this office letter No.3963/50-M-5 dated 27--11--1950 I have to state that the work cannot be completed in 1950-51 as it is situated in an out of the way place. The Superintending Engineer reports that if the interested ryots come forward to take up the work on contract there is a chance of the work being completed in two seasons. In the circumstances, the original recommendation made by me in letter No.3963/50-M-3 dated 22--8--50 to delete this work from the Intensive Cultivation programme holds good even now. This work may however be taken up as an ordinary G.M.F. work. Proposals will be sent separately on receipt of plans and estimates from the Superintending Engineer duly revised with reference to certain technical remarks pointed out to him in this office Memo No.3485/50-B-1 dated 7--11--50.

V. Krishnaswami 11/1/51

for CHIEF ENGINEER FOR IRRIGATION.

PK/11-1.

.

.

.

19 F. dA. (F.P.II) Dept

Abstract: Irrigation - Coimbatore Dt. Kollegal taluk - Ajjipuram village - Scheme for construction of anicut across Kaduthorahalla - Deletion from the I.C. (works) Programme for 1950-51 - Ordered.

Issue

Read: From the CE (I) letter No. 3963/50-H-3, dated 22.8.50.

Bd's Rojee. No. 210244/50-F[illegible]

dated 5.9.50.

From the Collector of Coimbatore Reg. A.2. 22648/50, d/23-[illegible]

Bd's Rojee. No. 250249/50-2-F[illegible], dated 28.10.50

From the CE (PHF) letter No. 3963/50. H-7, d/9-1-51

ORDER Ms. No. 82 dated 3.3.51.

In the circumstances reported by the CE (PHF) in his letter last cited, the Govt. direct that the Scheme for the Construction of an anicut across the Kaduthorahalla in Ajjipuram village in Kollegal taluk, Coimbatore Dt., be deleted from the Programme of I.C. (works) ~~Irrigation~~ Schemes for 1950-51 and be taken up as an ordinary work outside the aforesaid Programme, in due course.

To the CE (PHF)
To the Collector of C.B.E.
Copy to the P/Accountant (28/es)

2.3.51 hrhg 2/3/51

Jt.I A(FP) Br.

Sub: Irrigation - Coimbatore Dr. - Kollegal taluk - Ajjipuram village - Anicut across Nanthorahalla - Deletion from the D.C. Programme for 1950-51.

—×—

Ref: From the CE(I) to the CFP Lr. no. 3863/50 M dt 22/8/50.
From the Collr. of Coimbatore to the Jt. Dir. (FP) Lr. no. A.2. 22648/50 dt 23.9.50.
From the CE(I) to the CFP Lr. no. 3863/50-M-7 dt 9.1.51.

—×—

The Scheme for the construction of an anicut across Nanthorahalla stream in Ajjipuram village of Kollegal taluk, Coimbatore Dr. was included in Sec. I of the D.C. Programme for 1950-51. In August 1950, the C.E(I) reported that the success of the Scheme would entirely depend upon the ryots' response to resort to wet cultivation in the proposed ayacut under the Scheme and that, as it would take some time to decide the issues, it might not be possible to execute the Scheme before the target date. He therefore recommended that the work might be deleted from the target list. The Collector of Coimbatore, whose remarks were called for, reported that the lands to be benefited by the Scheme could be irrigated without any difficulty and that the pattadars were anxious to improve their lands if facilities for irrigation were provided. He therefore recommended that the Scheme might be taken up this year itself. The CE(I) was therefore

asked to state whether the Scheme could not be taken up for execution also so as to be completed before the end of March 1952. He was also asked to expedite submission of plans and estimates for the Scheme if it could be completed within the target date.

2. The CE(I) has now reported that the work cannot be completed in 1950-51 as it is situated in an out of the way place. The S.E. considers that if the interested ryots come forward to take up the work on contract, there is a chance of the work being completed in two seasons. Post the C.E. ~~has~~ states that the his original recommendations to delete the work from the I.C. programme holds good even now and that plans and estimates for the work will be submitted in due course for taking it up as an ordinary C.M.P. work. The estimated cost of the work is only Rs. 84,000/- and it may be possible to execute the work within one year. However, in view of the technical opinion expressed by the CE(I), this dept. may accept his recommendation for the deletion of the work from the I.C. programme for 1950-51 and for its execution outside the C.M.P. programme.

3. P.W.D., to whom the file has to be eventually transferred ~~with reference to 2 above. after incorporating deleting the work from the I.C. programme~~, may now see for remarks prior to circulation. C

FEA(FP)M
M024/51-JFP
22-1-51

18/1/51
for M
22.1.51

18/1/51
for

PWD

P.W.D(J)

ASSISTANT SECRETARY TO GOVERNMENT
J
22 JAN 1951
354
PUBLIC WORKS DEPARTMENT

A.S.

Notes from please may be perused. The views of FEA(FP) Dept. at 'B' above may be agreed to in this Dept. and the file

PWD (J)

250 24/50 returned to FDA (FP) Deptt (Re receipt of proposals from the Chief for the sanction of the scheme as an ordinary irrigation scheme is being watched in this Deptt file no. 4007-J/50)

X

DWS 29/1/51 hm 31/1/51

dd 3.2.51

D.S. 7.2.51

5.2.51

FA(FP).

BOARD OF REVENUE 7-FEB 1951 4722 FOOD PRODUCTION

P.W.D. U.O. 354J/51-1 5-2-51

DS

F.D.A.(F.P.II)

XX

This file relates to the deletion of the Scheme for the Construction of an anicut across the Kudumurattalla in Ajjipuram village of Kollegal Taluk, Coimbatore Dt. from the Programme of P.C. (works) ~~Irrigation~~ Schemes for 1950-51. The notes at pp. 1-2 ante explain the Case. In view of X above, the question of transferring this file to the P.W.D. for further action, as suggested at C on p. 2 ante, does not arise.

2. The file may be circulated to J.H.(P.W.) for information, before issue of orders.

BOARD OF REVENUE 2 OFB 1951 FOOD PRODUCTION

10.2.51 hm 10/2/51. B 10/2/51

I don't see why the item should be deleted in the face of the Collector's recommendation. The Govt wants to give up the scheme because it is not on our way please

JM

11

2504 | 50. Part II

Ref: Observations of D.S. at the bottom of p. 3 ante.

—

Submitted.

2. It will be observed from the C.E.'s report at p. 17 cf. that he is not for dropping the scheme altogether, ~~though it has been situated in front of the Ivory place~~ but has only suggested that it may be deleted from the Programme of I.C. (works) Schemes and taken up as an ordinary irrigation work having good value. In his opinion, the work cannot be completed in 1950-51 i.e. it cannot be brought into beneficial use before the end of the period of Intensive Cultivation ending with March '52. As regards the suggestion of the C.E. (I) to take up the scheme as an ordinary irrigation work, the P.W.D. have noted that the receipt of the proposals from the C.E. (I) for sanction of the scheme outside the I.C. Programme is being watched by them. In the circumstances, ~~the recommendation of the Collector should be good but~~ the P.W.D. will be taking further action in respect of this scheme. There can, therefore, be no objection to the deletion of the scheme from the I.C. Programme. For orders as to circulation of the case to Hon. (P.W.)

(which are expected to be completed and brought into beneficial use before March '52)

p 17 cf

ibid

X p. 3 ante

p 1 cf

Ans

May be seen from XX overleaf. The work will be deleted from the I.C. Programme & taken up by the P.W.D. as a G.M.F. work in due course.

Hon (PW)

20-2-51 | 21/2/51 | 21/2/51

Hon (PW)

26. 2. 51

Hon (CAN)

21/2/51

RECEIVED OF REVENUE
21 FEB 1951

F & A. (F.P.II) Deptt.

A.S.

Please see the orders in circulation at the bottom of p. 4 ante. A draft order is submitted below for approval.

2.3.51

(Issued as [illegible] dt 3.3.51)